

MADE IN ITALY

EN



Logic

INCLINED PLATFORM LIFT
FOR STRAIGHT STAIRS

extrema
people in motion



Since Logic runs on **rechargeable batteries**, the lift can be used even in the event of power blackouts. The motor-operated platform and safety bars (provided as standard) simply enable the **fully automatic opening and closing** of the platform. Logic is designed for both indoor and outdoor installation and, thanks to the modular concept of the rail, it is **available for delivery in a few days**.



Logic has a **very reduced encumbrance** in the folded position.



Remote controls to call the stairlift from the floor or send it to the parking position.



Foldable seat (optional) with safety belt, for seated use.




Wander lead for attendant control, with spiral cable (optional).




1. The **Touch control panel** allows ergonomic travel on the platform by simply resting fingers or hand on the illuminated up/down arrows, with no pressure required.
2. The **overload indicator and travel indicator** ensure compliance with current regulations and maximum safety in public and private environments.
3. The **emergency button** immediately stops the platform and prevents unintended operation.
4. The **innovative electronics** continuously monitor operation, simplify diagnostics and allow customization of the main parameters.
5. **Extrema provides as standard a two-way communicator** for immediate contact with the outside in case of need (SIM activation required, SIM not included).

TECHNICAL FEATURES OF LOGIC PLATFORM LIFT


Unfolded platform (loading/unloading at the bottom floor)

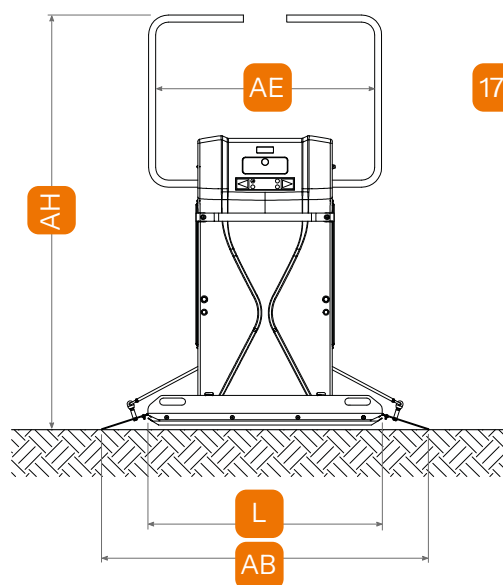

Unfolded platform, fixation with legs

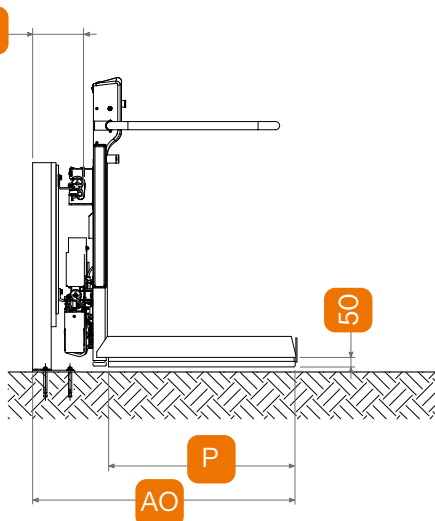

Folded platform, wall fixation

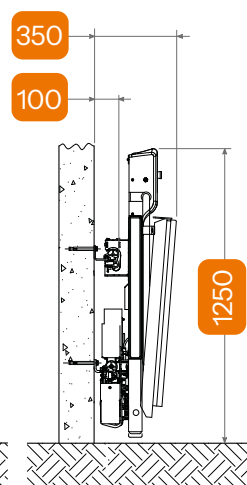

Platform dimensions (LxP)		750x600	750x650	750x700	850x700	1000x800	1250x800
AB	Overall platform length	1165	1165	1165	1265	1400	1650
AE	Overall useful length within barrier arms	745	745	745	825	975	1225
AH	Overall height unfolded platform	1640	1690	1690	1690	1765	1765
AO	Unfolded platform (wall fixation) (*)	850	900	950	950	1050	1050
AO	Unfolded platform (fixation with legs) (*)	920	970	1020	1020	1120	1120
(*) In case of frontal access (optional), add 25 mm							

Technical data	
Load capacity	250 Kg (300 optional)
Surmountable inclination	0°-45°
Speed	0,10 m/s
Control circuits voltage	24 V DC
Maximum power on board	0,54 kW
Main voltage	100-240V AC
Soft start and soft stop system	standard fitted
IP rating	IP 54

Colours	
Platform (**)	Dark Gray (similar to RAL 7011)
Fixings (**)	RAL 9006
Rails	Aluminium Silver anodized
(**) other RAL colours available on request	

Compliance	
2006/42/CE (ref. standard EN 81-40:2020)	

All dimensions are expressed in millimeters and all information contained in this catalogue have to be ment purely indicative. Extrema reserves the right to change at any time the information here reported without prior notification.

extrema
people in motion

Extrema S.r.l.
Via dell'Industria 2
46031 Bagnolo San Vito (MN) - I
Tel. (+39) 0376 252443
extrema.it